



LOADMASTER Military Certified Tie-Downs & Cargo Nets



- ◆ New Ratcheting Rope Tie-Downs have a built-in ratchet handle and two socket drives for 4 ways to tension rope
- ◆ Ratchet handle locks in place ensuring a secure load.
- ◆ Braided rope is high strength, low stretch, UV resistant, and replaceable with any length of Polypropylene, polyester, or nylon rope of the applicable diameter.
- ◆ Extremely strong-made of Military grade materials.
- ◆ Years of smooth operation even in cold, muddy and icy conditions.

Features	
3/8" Ratchet Quickie	- 650 lbs working load limit - Large 2 inch diameter hooks - 12 feet of replaceable rope - replaces 1" ratchet strap
1/4" Ratchet Quickie	- 225 lbs working load limit - 12 feet of replaceable rope - great for roof rack loads
1/8" Quickie Tie-Down	- 150 lbs working load limit - 6 feet replaceable rope - replaces bungee cords - MIL-C-5040 Type III 550 or 650 Paracord

Leader in Innovation, Not Imitation

Call 480-834-9055 for pricing
www.quickietiedown.com


Using the Loadmaster Ratchet

- ◆ Attach hook to a secure anchor point.
- ◆ Position ratchet handle in release position. Reel out required length of rope.
- ◆ Attach 2nd hook to load or a secure anchor point.
- ◆ Position ratchet handle in lock position. Take slack out of rope by pulling loose end of rope.

Tension the Loadmaster Ratchet Tie-Down rope in 4 different ways:

- ◆ Pulling the loose end of the rope like the Original Tie-Down series.
- ◆ Using a socket wrench in the socket drive on either side of the hub.
- ◆ Using the built-in ratchet handle feature.

To release, press tab on ratchet handle and rotate back into Release Position.

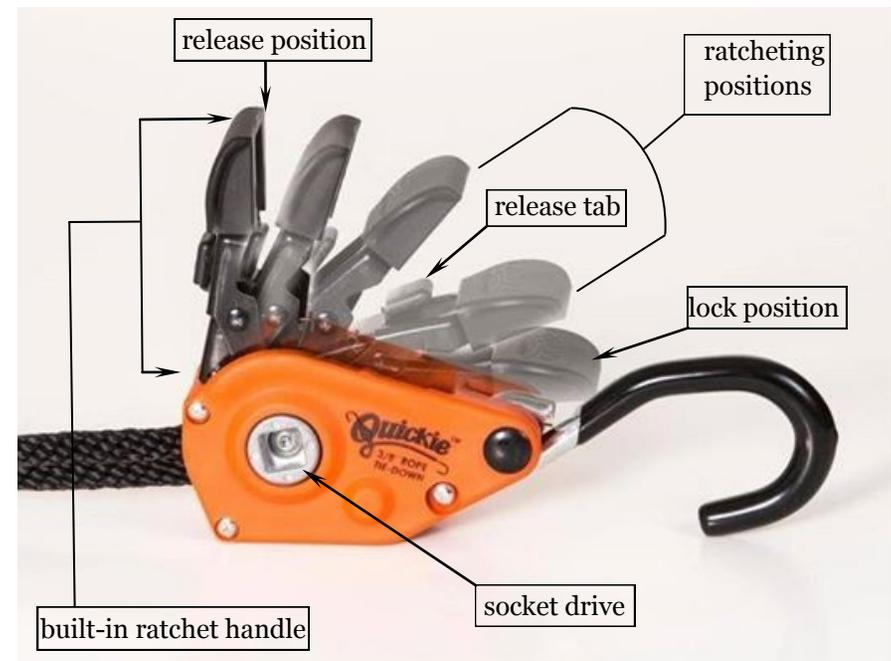

Warning - Read Before Use

- ◆ Failure to comply with this warning may result in tie-down failure, serious personal injury, or death. Use of this product demonstrates an understanding of this warning and the risks involved.
- ◆ Never exceed working load limit printed on tie-down housing.
- ◆ Inspect before each use. Do not use if any signs of damage, deformation, or alterations are present.
- ◆ Always protect rope from sharp or abrasive surfaces. Hardware must be pulled in a straight line or strength will be reduced. This tie-down assembly is not designed for lifting, towing or personal restraint.
- ◆ Refer to Federal, State, Provincial, Industry or local regulations for proper tie-down methods.

Warranty

The use and attachment of this product is beyond the control of Quickie Tie-Down Enterprises, LLC. The liability of this product is limited to the replacement cost of this product should it be found defective in material and/or workmanship.

Quickie Tie-Down Enterprises, LLC warrants its products to be free of defects in composite materials or workmanship. Warranty is limited to replacement of defective unit only. Warranty does not cover rope and hooks or damage caused by misuse, abuse, or use contrary to Quickie Tie-Down Enterprises, LLC specifications and instructions. Warranty is void one year after date of purchase.